

Main Characteristics				
Length Overall	208 ft	(63.40 m)		
Beam	44 ft	(13.41 m)		
Operating Draft	13 ft	(3.96 m)		
Gross Tonnage	1,335			
Capacities				
capacities				
Clear Deck Space	108 ft x 32 ft	(32.92 x 9.75m)		
Fuel Oil	112,890 gal	(427.36 m <sup>3</sup> )		
Ballast	161,840 gal	(612.63 m³)		

20,200 gal

Accommodations
Accommodations for 30 people composed of
2 x 1 man cabins
4 x 2 man cabins
1 x 4 man cabins
4 x 6 man cabins
Crew 8
Guests 30
Fully Airconditioned and Heated

		Generato	
Performance		K.W.	
Top Speed	12 knots		
Fuel Consumption	12 knots @ 100gph		

(76.46 m<sup>3</sup>)

## Propulsion

Potable Water

Main Engines	(2) 3512TA CAT
Total Horsepower	3000 HP
Bow Thrusters	(1) 490 HP

Special Features Command & Control Room workspaces and offices with enhanced berthing for up to 38 persons. Expanded personnel capabilities upwards of 50 individuals for short-duration operations.

Launch and recovery equipment for small craft, ROV, and towed-array operations, including three hydraulic deck winches rated to 5, 10, and 20 tons, respectively.

Two 6.5 meter Brunswick Impact 650 Rigid Hull Inflatable Boats (RHIB) powered by 170hp Volvo Penta outdrives included for charterer's use.

A helicopter deck rated for Bell L206 and suitable for aerial drone support.

Generators	
K.W.	(3) 250kW

-----

. . . . . . . . . . . . . . .

Deck Cranes


(2) 20 ton Extendable Boom (18.14 MT)


Classification	
Subchapter	L&I
Flag	U.S.A.




## **NORTHSTAR NAVIGATOR**



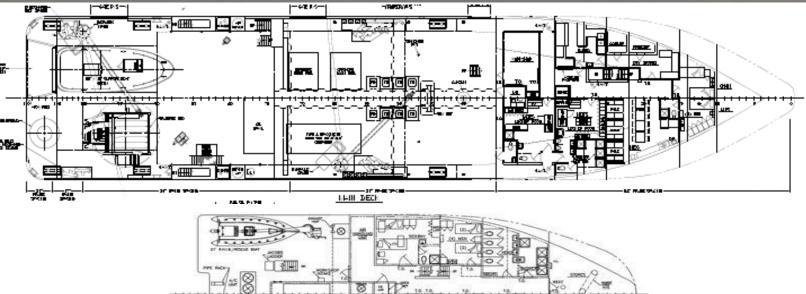

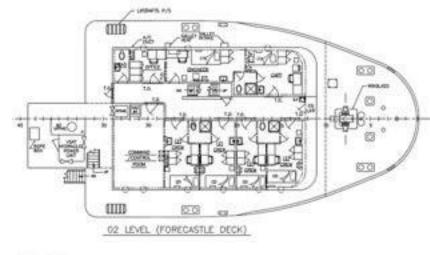





northstarmarineinc.com